


CASE RELAY BOARD WIRING DIAGRAM
 MODEL: DRB-3P

"Use Copper Conductors Only"

Before service, all breakers
 must be in the "OFF" Position

Connect to 208VAC 3 PHASE
 30 Amp Input Protection

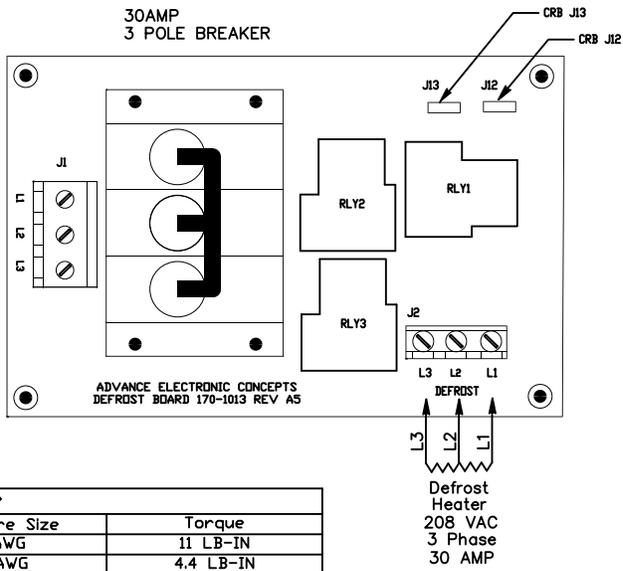

Connector Torque

Connector	Min Wire Size	Max Wire Size	Torque
J1	10 AWG	6 AWG	11 LB-IN
J2	14 AWG	10 AWG	4.4 LB-IN