

LOW TEMP REFRIGERATION CASE POWER MODULE WIRING DIAGRAM
 MODEL: RCPM-2P-120AC


"Use Copper Conductors Only"

Before service, all breakers must be in the "OFF" Position


Connect to 208VAC with Neutral
 30 Amp Input Protection

Connector Torque			
Connector	Min Wire Size	Max Wire Size	Torque
J1	10 AWG	6 AWG	11 LB-IN
J3, J4	14 AWG	10 AWG	4.4 LB-IN
J2	20 AWG	14 AWG	3.5 LB-IN

CONTROLLER
 120VAC OUTPUTS



ADVANCE ELECTRONIC CONCEPTS
 170-1051 REV B
 REFRIGERATION CASE POWER MODULE

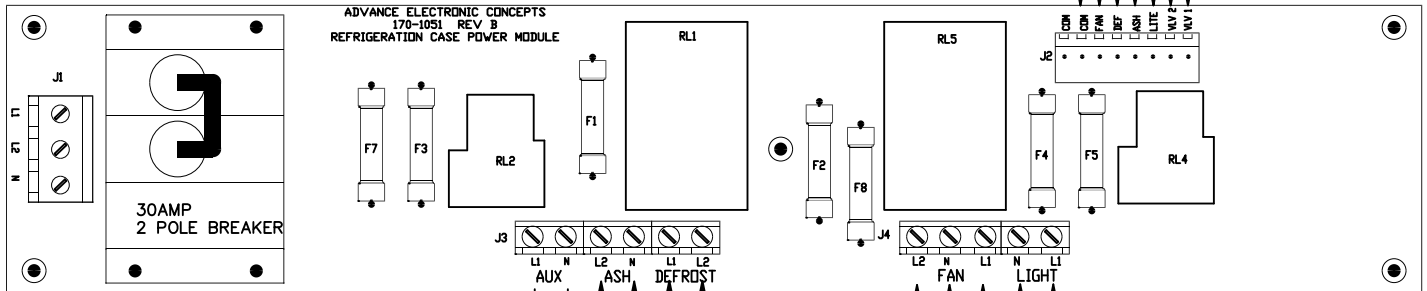


FUSE GUIDE (All Fuses 250VAC Min Rating)

- F1 = 25 AMP (DEFROST L1)
- F2 = 25 AMP (DEFROST L2)
- F3 = 15 AMP (ASH)
- F4 = 10 AMP (FAN L1)
- F5 = 10 AMP (LIGHT)
- F7 = 5 AMP (AUX)
- F8 = 10 AMP (FAN L2)

"WARNING"

"To reduce the risk of electric shock,
 replace only with the same type and rating fuse"

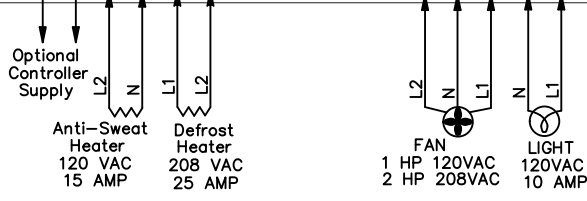

Advance Electronic Concepts, Inc.
 Doc #008-1031 Rev C