
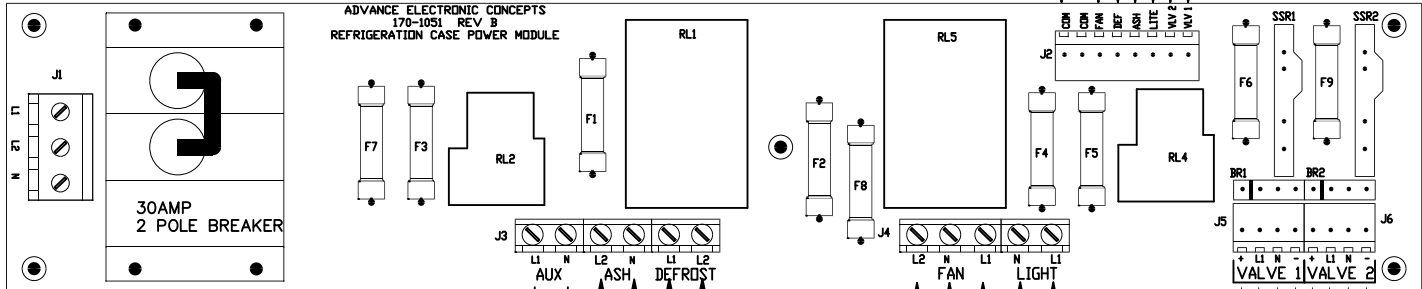


LOW TEMP REFRIGERATION CASE POWER MODULE WIRING DIAGRAM
MODEL: RCPM-2P-24AC

"Use Copper Conductors Only"
 Before service, all breakers must
 be in the "OFF" Position

Connect to 208VAC with Neutral
 30 Amp Input Protection




Connector Torque			
Connector	Min Wire Size	Max Wire Size	Torque
J1	10 AWG	6 AWG	11 LB-IN
J3, J4	14 AWG	10 AWG	4.4 LB-IN
J2, J5, J6	20 AWG	14 AWG	3.5 LB-IN



FUSE GUIDE (All Fuses 250VAC Min Rating)

- F1 = 25 AMP (DEFROST L1)
- F2 = 25 AMP (DEFROST L2)
- F3 = 15 AMP (ASH)
- F4 = 10 AMP (FAN L1)
- F5 = 10 AMP (LIGHT)
- F6 = 2.5 AMP (VALVE 1)
- F7 = 5 AMP (AUX)
- F8 = 10 AMP (FAN L2)
- F9 = 2.5 AMP (VALVE 2)

"WARNING"
 "To reduce the risk of electric
 shock, replace only with the
 same type and rating fuse"



Advance Electronic Concepts, Inc.
 Doc #008-1033 Rev C